



**GOVERNMENT OF INDIA  
CENTRAL WATER COMMISSION  
MEGHNA INVESTIGATION SUB-DIVISION-III  
PANCHAYAT ROAD, SILCHAR (ASSAM), PIN 788 004**

No. MISD/III/JE-HQ/NIQ/2011/61-67

Dated the 31<sup>st</sup> January, 2011

**NOTICE INVITING QUOTATION**

Sealed quotations are hereby invited by the undersigned on behalf of the President of India from reputed contractors registered under Govt departments of central/State/PSUS for installation of gauge posts at G&D site Matijuri as detailed below. **The quotations should reach in the office of the undersigned on or before 23-02-2011 up to 15.00 hrs** and will be opened on the same day i.e. **23-02-2011 at 15.30 hrs** in the presence of quotationers or their authorized representatives, if any.

The undersigned reserves the right to accept or reject any or all the quotations without assigning any reason thereof.

Sl. No.	Description and specifications of item	Unit	Qty.	Rate (₹)	Amount (₹)
1.	Earthwork excavation in foundation trenches of walls, retaining walls, footing of columns, steps, septic tanks etc, including refilling(return filling) the quantity as necessary after completion of work, breaking clods in return filling, dressing, watering and ramming etc. and removal of surplus earth with all leads and lifts as directed including bailing out water where necessary as directed and specified. A) Up to a depth of 2.00 m below the existing ground level in hard/dense soil	cum	4.86		
2.	Earth/sand filling in plinth in layers not more than 150mm thick including necessary carriage, watering, ramming etc, complete as directed and specified including payment of land compensation, forest royalty, sales tax and other duties and taxes as may be necessary. With earth or silt or sand obtained by head load with lead up to 90m and lift up to 2m	cum	1.62		
3.	Plain cement concrete works with coarse aggregate of sizes 13mm to 32mm in foundation bed for footing steps, walls, brick work etc, as directed and specified including dewatering, if necessary, curing complete. In prop :1 cement:3: sand: 6 coarse aggregate by volume	cum	3.78		
4.	Providing 15mm thick cement plaster including cleaning the surface and curing complete in prop 1:3	sqm.	10.80		

**Except the gauge posts all materials required for the work are to be supplied by the contractor. Only the wooden gauge posts will be supplied departmentally at site location.**

**Terms & Conditions:**



1. The quotations duly signed should be properly sealed and dropped in quotation Box in the office of the Assistant Executive Engineer, Meghna Investigation Sub-Division-III, Panchayat Road, Silchar, Assam PIN-788 004. The sealed envelope should be superscribed "**Quotation for installation of wooden Gauge Posts at G&D site Matijuri under MID, CWC, Shillong due on 23-02-2011**".
2. In the event of the date of opening of quotation being a holiday, quotations will be opened on the next working day with timings unchanged.
3. Quotationers must have PAN/TIN/Service Tax number/VAT.
4. The undersigned does not bind himself to accept the lowest quotation and reserve the right to accept or reject any or all the quotations without assigning any reason thereof.
5. The material must be of standard quality and as per specifications and free from all defects. The material if found defective subsequently or not conforming to the specifications as stated above, have to be replaced/repared by the firm without any additional charges. The work should be carried out as per the drawing enclosed at Annexure-I and as directed by the site-in-charge.
6. Before starting the work, material shall be got approved from AEE, MISD-III, CWC, Silchar.
7. The quantity of work may be increased or decreased at the time of order without assigning any reason thereof.
8. The work of installation of wooden gauge posts at site location in all respects should be completed within 15 days from the date of issue of this order.
9. The rate quoted should be inclusive of all duties, taxes and other levies as applicable. No other incidental charge, whatsoever, will be entertained.
10. The validity of quotation for acceptance shall be 90 days and rates quoted should remain valid for 180 days from the date of opening.
11. The rate should be quoted both in words and in figures. Corrections/ overwriting in the quotation, if any, shall be made by initialing, dating and re-writing.
12. The payment will be made by account payee cheque for local supplier or by Demand Draft for outstation supplier on production of pre-receipted bill in triplicate only after satisfactory completion of work as per specification.
13. TDS shall be deducted from the bill at the time of payment as per latest Govt. orders.

**Asst. Executive Engineer  
MISD-III, CWC, Silchar**

**Copy to:**

1. The Director, SM Directorate, CWC, Sewa Bhawan, RK Puram , New Delhi with the request to publish at CWC Web site. A softcopy is emailed to [smdte@nic.in](mailto:smdte@nic.in) for necessary action please.
2. The Executive Engineer, Meghna Investigation Division, CWC, Shillong
3. The AAO, Accounts Branch, Meghna Investigation Division, Yingyar Villa, Lumpyngngad, Shillong-793 014 with the request to present at the time of opening of quotation.
4. Notice board of office of Executive Engineer, Meghna Investigation Division, Yingyar Villa, Lumpyngngad, Shillong.
5. Notice board of office of Assistant Executive Engineer, MISD-II/MISD-III, CWC, Panchayat Road, Silchar(Assam)
6. Notice board of office of Sub-Divisional Engineer, MISD-I, CWC, Shillong
7. As per the list enclosed.

# INSTALLATION OF GAUGE POSTS AT G&D SITE

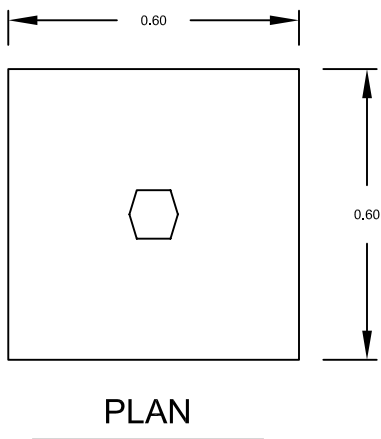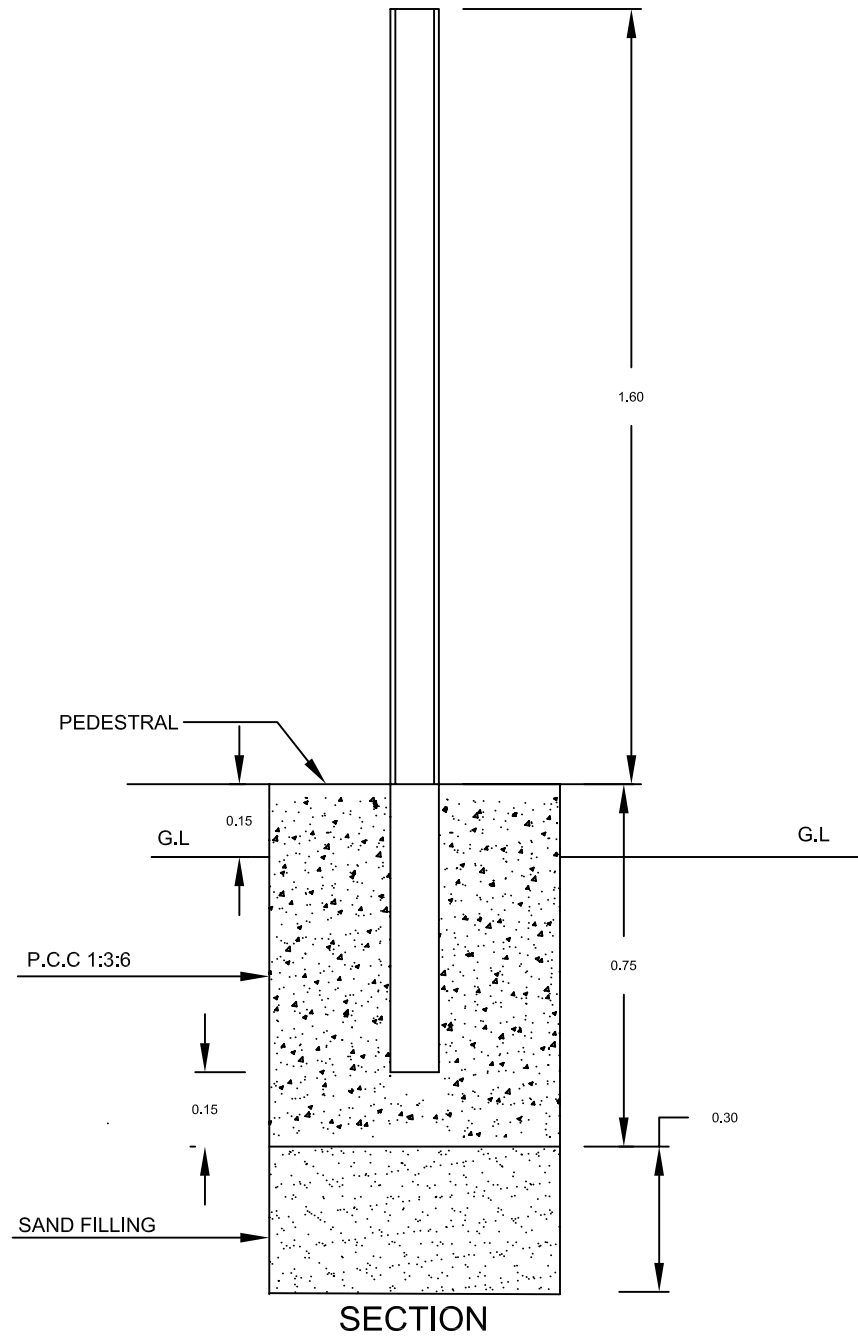

All dimensions in metres